

# H48-6G

## Thermal Pad




### Features

- Very good thermal conductivity
- Natural tack
- Easy to assemble
- Very good insulator

### Applications

- Electronic components: IC, CPU, MOS, LED,
- Mother Board, Power Supply, Heat Sink, LCD-TV,
- Notebook, PC, Telecom Device, Wireless Hub,
- DDR II Module, DVD Applications, Hand-set Applications ect.

### Thermal Resistance VS. Pressure VS. Deflection

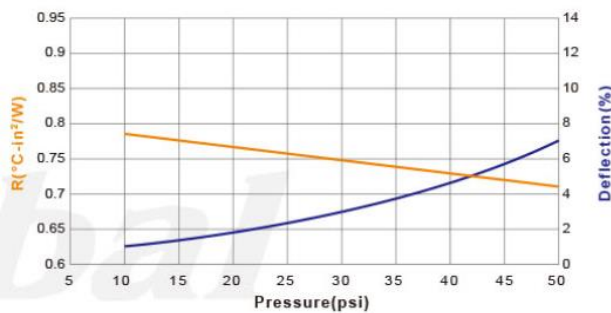


Pressure (psi)	R(°C-in <sup>2</sup> /W)	Deflection(%)
10	0.78	1
30	0.75	3
50	0.71	7

### Properties

- ◆ REACH Compliant
- ◆ RoHS Compliant
- ◆ UL Compliant

Thermal Conductivity: 6 W/m.K



Hardness: 35 (Shore A)




Testing sample thickness: 1.0mm


In "Thermal resistance V.S. Pressure V.S. Deflection" chart, H48-6G provides low thermal impedance. The pressure gets higher, the thermal impedance gets lower, and deflection percentage gets higher. H48-6G provides good compliance and softness.

Properties	H48-6G	Unit	Tolerance	Test Method
Thermal Conductivity	6	W / mK	±0.6	ASTM D5470
Thickness	0.3~5.0	mm	-	ASTM D374
(the thickness can be ordered)	0.0118~0.1969	inch	-	ASTM D374
Color	Gray	-	-	Visual
Flame Rating	V-0	-	-	UL 94
Dielectric Breakdown Voltage	13	KV / mm	±0.13	ASTM D149
Weight Loss	<1	%	-	ASTM E595
Density	3.09	g / cm <sup>3</sup>	±0.2	ASTM D792
Working Temperature	-40~+200	°C	-	-
Volume Resistance	>10 <sup>11</sup>	Ohm-m	-	ASTM D257
Elongation	60	%	-	ASTM D412
Tensile Strength	6	Kgf / cm <sup>2</sup>	-	ASTM D412
Standard Shape	Sheet ones	-	-	-
Hardness	35	Shore A	±5	ASTM D2240

Need samples?



Available to apply adhesive



Pre-cut for different shapes

1. Choose the P/N
2. Fill into size: X, Y, Z
3. Apply the adhesive or not? 0=none, 1A=one side, 2A=two sides
4. Fill the quantity you need

**T-Global Technology Co., Ltd**

No. 33, Ln. 50, Daren Rd., Taoyuan Dist., Taoyuan City 330, Taiwan

TEL: +886-3-3618899

FAX: +886-3-3665666

www.tglobalthermal.com

www.tglobal.com.tw

